

MRM-700U Series
Manual Stations



MRM-701U
Single Action Manual Station

MRM-710U
Dual Action Manual Station

Features

- Single or Dual Action
- Key resettable
- Terminal connectors
- Gold plated SPST contacts
- Optional auxiliary contacts
- High-gloss red enamel finish
- Plastic breakrod
- Meets ADA 5 lb. maximum manual-force
- Mounts on standard single gang box, Secutron's MRM-700 surface metal backbox or MRM-700WP weather proof backbox

Description

Secutron's MRM-700U Series Manual Stations provide manual fire reporting. These high quality, die-cast metal manual stations are available in either single or dual action configurations with SPST contacts and terminal strip connections. The normally open contact, which closes when the manual station is activated, is rated for 1 amp, 30 VDC. The contacts are gold plated to avoid the risk of corrosion.

The MRM-700U Series Manual Stations are available in many different configurations as either single or dual-action devices.

The MRM-701U is a single action, single stage manual station. Model MRM-710U is a single stage, dual action manual station.

All models are available with key resets, terminal connectors, SPST gold contacts and CAT-30 lock and keys. The units mount on a standard single gang backbox, Secutron's MRM-700 surface metal backbox or MRM-700WP weather proof backbox.

The MRM-700 Series Manual Stations are listed for outdoor applications when used with the MRM-700WP.

Operation

The MRM-701U Single Action Manual Station is operated by pulling down the handle marked "PULL HANDLE" on the front of the station. The MRM-710U Dual Action Manual Station is operated by pushing the bar labelled "PUSH BAR" and then pulling down the handle marked "PULL HANDLE". The MRM-700U Series Manual Stations are reset by opening the station with the key, placing the handle in the normal upright position and re-locking the station.

Specifications

The manual station shall be Secutron's MRM-700U Series. Operating instructions shall be in raised English lettering and the unit shall be constructed of high quality die-cast metal and finished in red enamel paint to provide quick identification. Pulling the handle shall initiate immediate operation of the alarm detection circuit. All manual fire alarm stations shall be installed as per the specific requirements outlined in the UL codes, as well as all other applicable national or local codes. Final acceptance is subject to the local authority having jurisdiction.



S6492



S6492



7150-1656:128



352-03-E

Specifications

Switch Rating:	1 Amp @ 30 VDC 0.1 Amp @ 125 VAC
Manual Station Dimensions:	4.9" H x 3.5" W x 2.0" D
Color:	Red with raised white letters, white manual bar with raised black letters.

Surface Mount Backboxes



MRM-700 Surface Mount Backbox


Dimensions:
5" H x 3.6" W x 2.0" D



MRM-700WP Weatherproof Surface Mount Backbox

Dimensions:
5" H x 3.6" W x 2.2" D

Typical Wiring Diagram

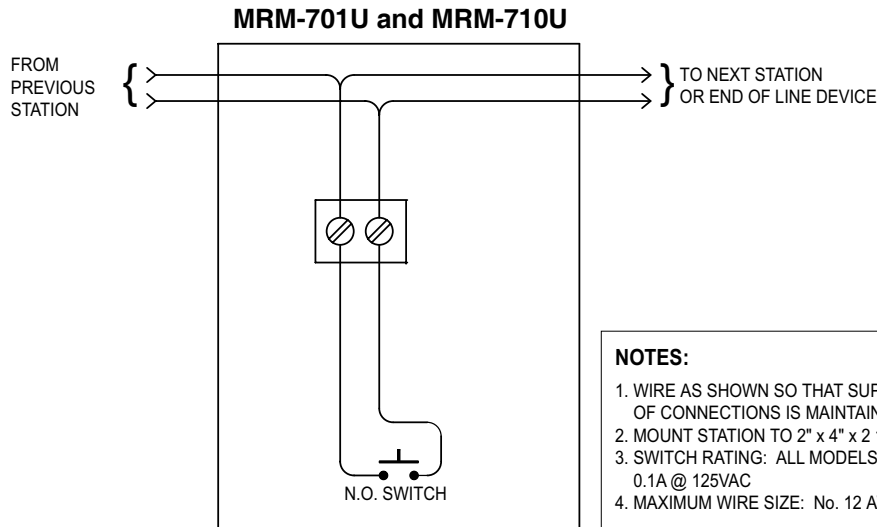

Ordering Information

Model	Description
MRM-701U	Single Action Manual Station
MRM-705U	Single Action Manual Station c/w one additional Form "C" (SPDT) Contact
MRM-710U	Dual Action Manual Station
MRM-715U	Dual Action Manual Station c/w one additional Form "C" (SPDT) Contact
MRM-700	MRM-700U Series Interior Surface Mount Backbox, Red Finish
MRM-700WP	MRM-700U Series Weatherproof Surface Mount Backbox, Red Finish

